


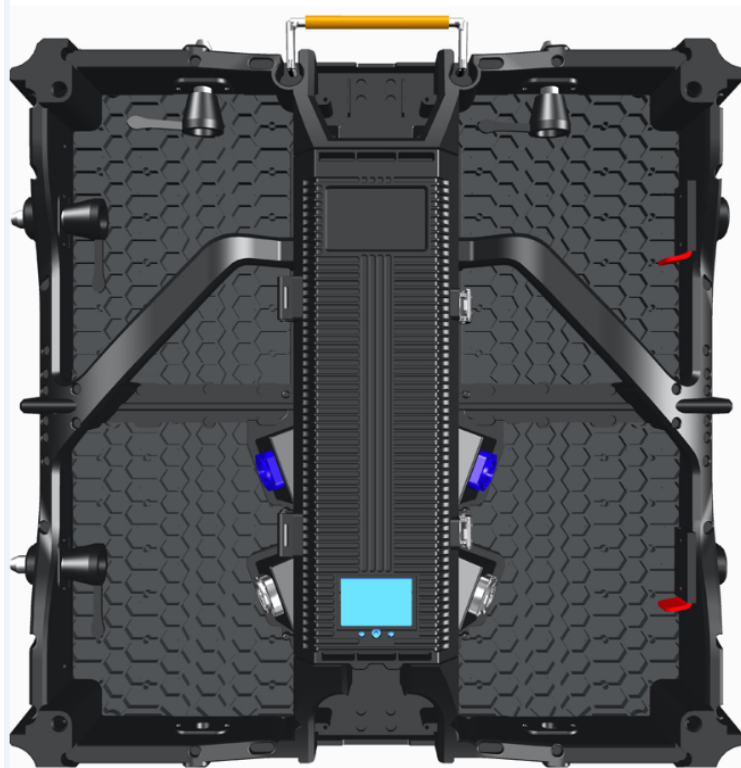

P3.9

Environment	Outdoor IP65
LED Type	SMD1921
Physical Pixels Per Cabinet	128 x 128
Physical Pixels Per Module	64 x 64
Cabinet Size	500mm x 500mm
Cabinet Weight	18 lbs
Brightness	6,000 Nits
Refresh Rate	1,920 Hz or 3,840 Hz
Power Consumption	600 Watts/Sqm (Max)
Power Input	AC 110V or 220V 50/60Hz
Power Output	5 Volts
Life Span	100,000 Hours
Viewing Angle	140 Degrees

P4.8

Environment	Outdoor IP65
LED Type	SMD2727
Physical Pixels Per Cabinet	104 x 104
Physical Pixels Per Module	52 x 52
Cabinet Size	500mm x 500mm
Cabinet Weight	18 lbs
Brightness	6,000 Nits
Refresh Rate	1,920 Hz or 3,840 Hz
Power Consumption	600 Watts/Sqm (Max)
Power Input	AC 110V or 220V 50/60Hz
Power Output	5 Volts
Life Span	100,000 Hours
Viewing Angle	140 Degrees

P6.25

Environment	Outdoor IP65
LED Type	SMD3535
Physical Pixels Per Cabinet	80 x 80
Physical Pixels Per Module	40 x 40
Cabinet Size	500mm x 500mm
Cabinet Weight	18 lbs
Brightness	6,000 Nits
Refresh Rate	1,920 Hz or 3,840 Hz
Power Consumption	600 Watts/Sqm (Max)
Power Input	AC 110V or 220V 50/60Hz
Power Output	5 Volts
Life Span	100,000 Hours
Viewing Angle	140 Degrees